

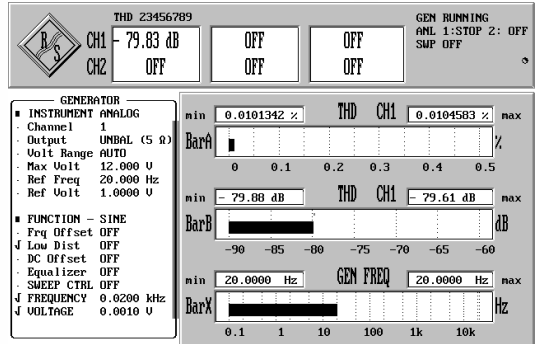
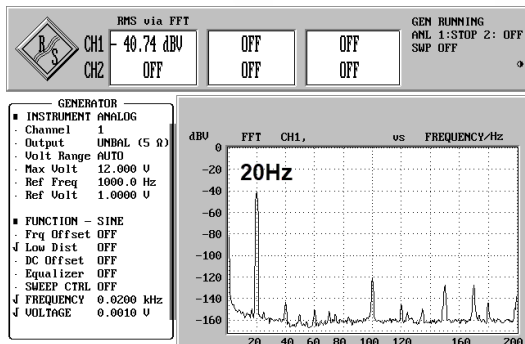
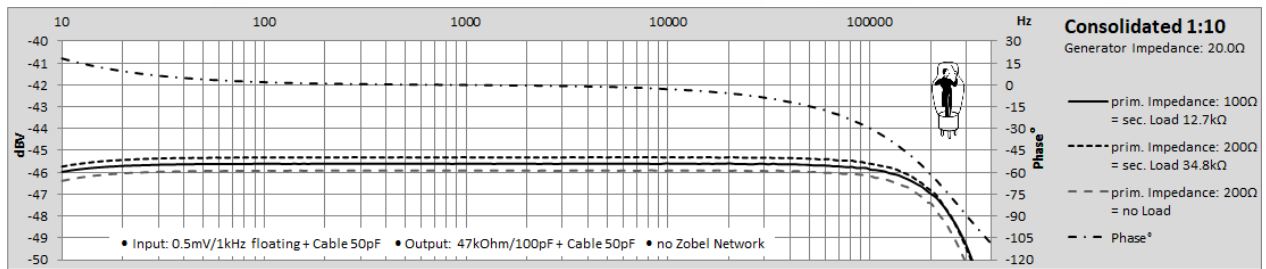
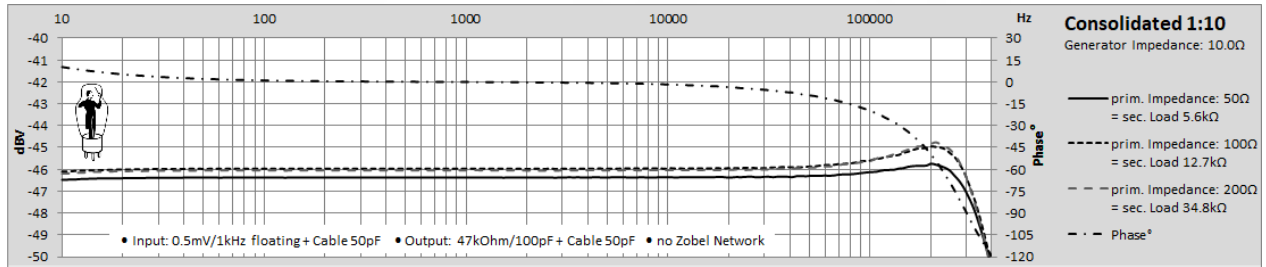
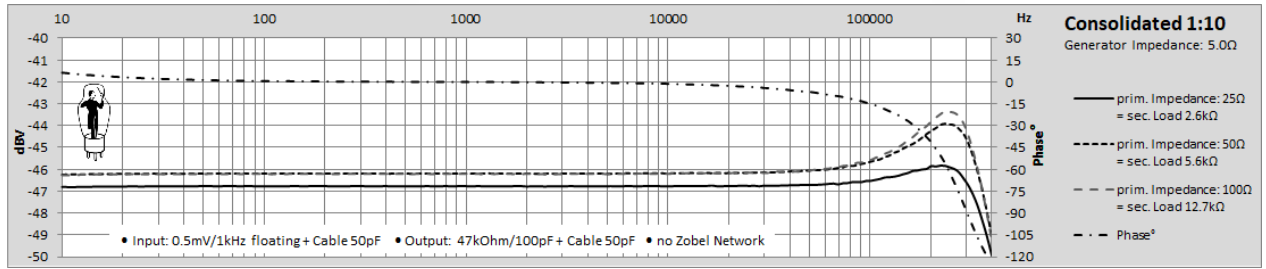


# Consolidated Audio 1:10 MC-Transformer


This is not the result of a scientific measurement, just DIY-Information to choose the desired MC-Transformer

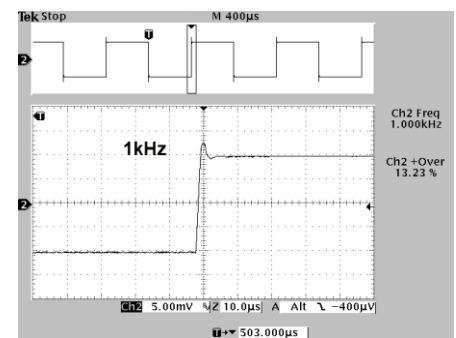

Input: 1.0mV<sub>RMS</sub>/5Ω + Cable 50pF Output: 47kΩ/100pF + Cable 50pF (no Impedance Correction, no Zobel-Network)

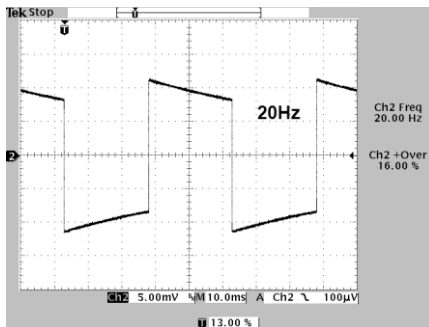

Input: 1.0mV<sub>RMS</sub>/15Ω + Cable 50pF Output: 47kΩ/100pF + Cable 50pF (no Impedance Correction, no Zobel-Network)

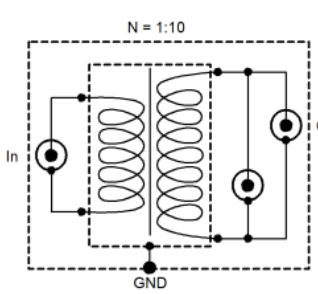

- Turns Ratio (N): 1:10
- Toroidal Core
- Prim. Inductance: (L<sub>p</sub>): 960mH/100Hz (Output open)
- prim. Winding Silver, sec. Winding Copper
- No Noise-Shield between prim./sec. Windings
- Case-Screw for Grounding
- Input for Load Correction
- THD: 20Hz ~0.014%
- 1kHz ~0.002%
- 10kHz ~0.001%

